

# TELEPHONE INTERCOM & ACCESS CONTROL SYSTEM EL1SS

SECTION 28 13 00



## KEY FEATURES

**UNIT INTERFACE CAPABILITIES**  
**STAND ALONE**

PIN/voice  
Yes

## SPECIFICATIONS

**DATA CONNECTIVITY**

Keypad

**VOICE COMMUNICATION**

Intercom/POTS/ filtered DSL

**CALLING CONNECTIVITY**

POTS

**POWER SUPPLY**

120VAC to 16VDC transformer (included in carton)

**PROGRAMMING (DATABASE MANAGEMENT)**

Keypad

**LOCAL USER CAPACITY**

200

**MAX NUMBER OF GATES/DOORS OF CONTROL (EACH)**

2

**RELAY OUTPUT**

2 (1 primary, 1 auxilliary)

**MOUNTING OPTIONS**

Surface/gooseneck

**OPERATING TEMPERATURE**

-4°F to 149°F (-20°C to 65°C)

**CAMERA READY**

No

**ANTI-TAMPER ALARM**

Yes

**WARRANTY**

2 years

## CONSTRUCTION

**ENCLOSURE MATERIAL**

Stainless steel


**DATA SHEET**  
TELEPHONE INTERCOM & ACCESS  
CONTROL SYSTEM

**LiftMaster**

# TELEPHONE INTERCOM & ACCESS CONTROL SYSTEM EL1SS

SECTION 28 13 00

## DIMENSIONS

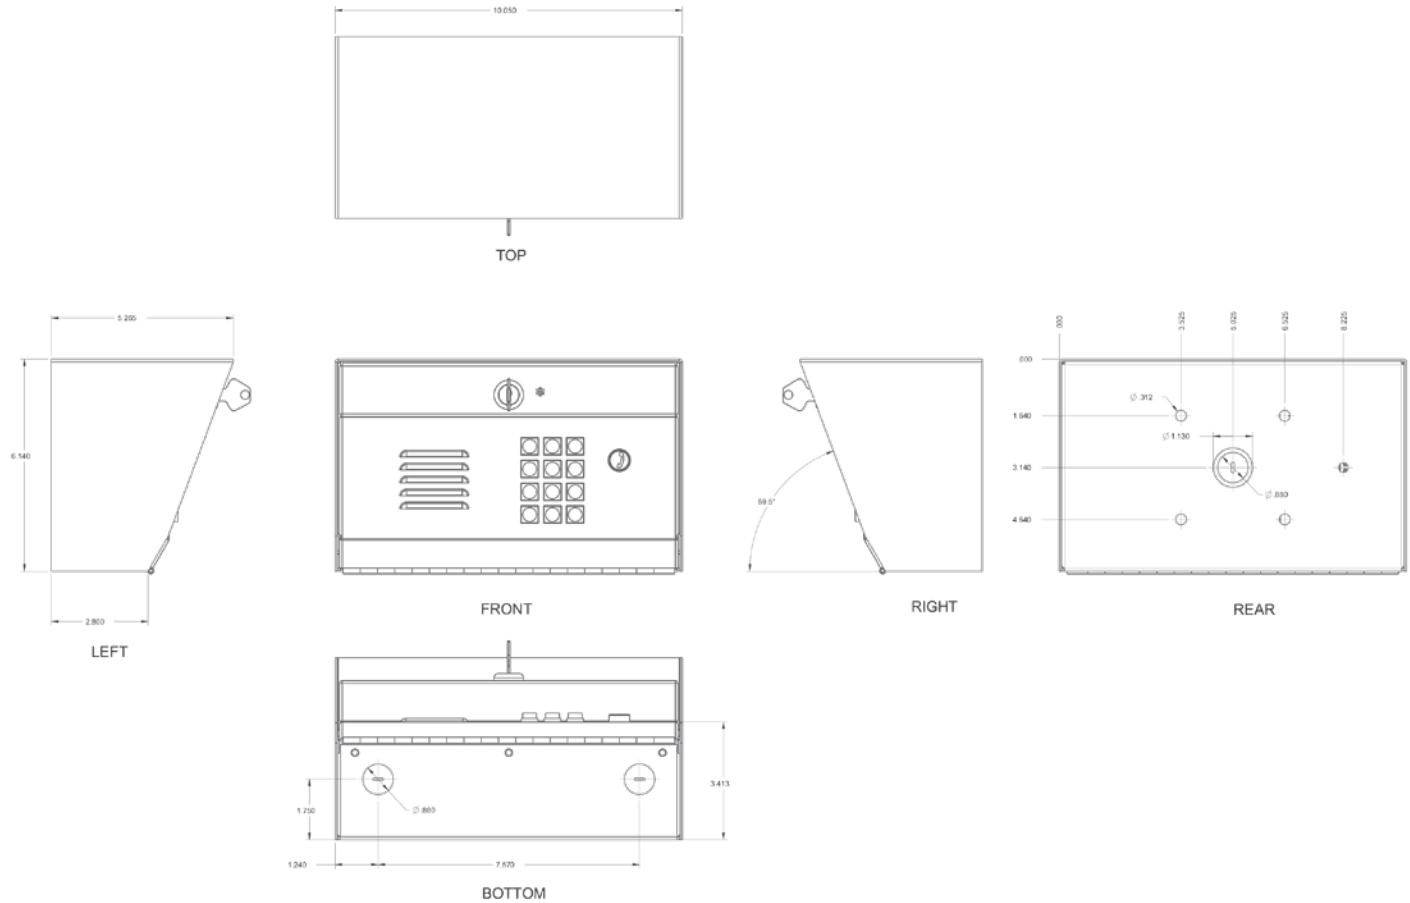

## RANGE

EL1SS Feature	Wired	Wire type	Range
Power 120VAC to 16VDC transformer (from outlet to controller)	x	2 wire (18 AWG) 2 wire (16 AWG) 2 wire (12 AWG)	Up to 150 ft. 150 ft. to 250 ft. 250 ft. to 500 ft.
Relay output wiring	x	2 wire (18-24 AWG)	Up to 2500 ft.
AutoCall	x	2 wire (18-24 AWG)	Up to 500 ft.
Telco Phone Lines (TES unit to house)	x	2 wire (18-24 AWG)	Up to 500 ft.