



# EXTREME SERIES™

POWERED BY **LiftMaster**



## CLOPAY® EXTREME SERIES™ HIGH PERFORMANCE SECTIONAL DOOR SYSTEM

The Clopay® Extreme Series™ High Performance Sectional Door System boasts an average opening speed of 24" per second, allowing productivity to flourish while also delivering the aesthetic you're looking for. Tandem nylon rollers improve roller life and reduce running noise for smooth, quiet operation while safety stays top of mind with enhanced features such as 3' of light curtain protection, a cable management system and standard cable tension monitors.

[clopaycommercial.com](http://clopaycommercial.com)



# CLOPAY® EXTREME™ SERIES OPERATOR POWERED BY LIFTMASTER®

The Extreme Series™ High Performance Sectional Door System features a LiftMaster® direct drive operator with an opening speed of 24" per second and up to 600 cycles per day. The display's easy-to-read user interface provides ease of limit-setting at floor level and can connect to the operator via Wi-Fi to myQ® Facility.



**SERIES AVAILABLE** For specific model information visit [www.clopaycommercial.com](http://www.clopaycommercial.com)

## architectural series



EX904, EX904U

## energy series with intellicore



EX3728, EX3729,  
EX3724, EX3722, EX3723, EX3721, EX3720,  
EX3717, EX3718, EX3708, EX3709, EX3715

## energy series



EX3208, EX3209,  
EX3200, EX3213, EX3211,  
EX3220, EX3158, EX3159, EX3150

## SAFETY FEATURES



UL325 approved  
light curtain



Cable tension  
monitor



Optional wireless  
bottom safety edge


## HARDWARE FEATURES



Double-end stiles




Tandem rollers



Cable snubbers



Pusher springs  
(required for standard lift track)

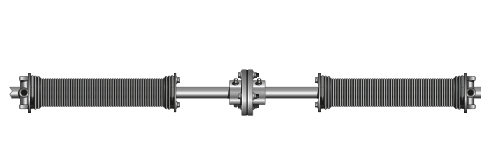

50,000 cycle springs standard\*

## STANDARD SPECIFICATIONS

Max Width	16'2"
Max Height	14'0"
Max Door Weight	1,000 lbs
Upward Travel	24" per second
Downward Travel	15" per second
Stiles	Double end stiles (standard)
Glazing Available	Tempered, insulated tempered, acrylic and polygal
Springs*	50,000 cycle standard (Max cycles available on a single shaft line)
Track Size	2" angle mount track standard 3" track where applicable
Track Type	Standard lift, high lift and full vertical

\*Cycles can vary depending on door configuration.

## WINDCODE®



Design pressures (DP) up to 36 PSF depending on door size, configuration, and exposure. Models tested 50% greater than DP.



For more information on these and other Clopay products, visit [clopaycommercial.com](http://clopaycommercial.com). Architects and specifiers, visit [architectdoorhelp.com](http://architectdoorhelp.com).



©2022 Clopay Corporation. All rights reserved.

