

The Right Solution for Every Application.

LiftMaster's full line of access control products and software allow for seamless solutions designed to meet the exact requirements of any property.



Safety and Control Where It Matters Most

Whether it's a single family home, a gated community or a larger multi-use building, communities of all sizes count on LiftMaster® to provide trusted and reliable access every day. The LiftMaster suite of products seamlessly work together for all your hardware and software needs. Confidently manage access of your community with a LiftMaster solution.



Residential Gated Community

Quick and easy installation and IP connectivity provide remote monitoring as well as the ability to program from anywhere. IPAC is the premier solution for retrofitting Plain Old Telephone Service (POTS) and for new installations. The Digital Subscriber Line (DSL) connects to the LiftMaster® Cloud to deliver a voice and data service, and with unlimited expansion, you can network as many gates and doors as required.

LiftMaster Cloud



Internet Protocol Access Control IPAC

Internet Protocol Door Controller IPACIPDCC



Single Entry Access Control Keypad and Proximity Reader KPR2000



Credential Access Receiver PPWR

3-Button Passport MAX Mini Keychain Remote Control PPK3M




High-Traffic Swing Gate Operator CSW24U



LiftMaster Cloud

Access Control Management for the IPAC and IPACIPDCC

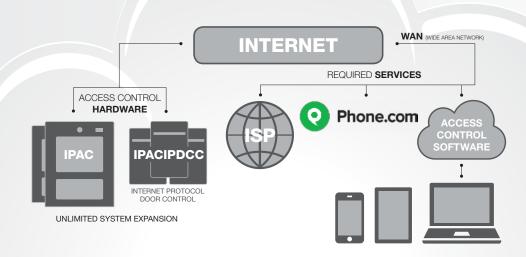







Mixed-Use Building with Parking Garage

An affordable door controller at each entrance provides instant tracking, remote management and resident access control. Ideal when a Telephone Entry System is not required, the IPACIPDCC is easy to install and program from anywhere.



Small Gated Community

Featuring a rugged design, the EL25 offers reliable access and expandability in a cost-effective way for multiple entry points while providing the safety and control residential communities desire. The addition of the KPW250 is also a great stand-alone solution for residential-only back gate entrances.



Apartment/Condo or Commercial Building


Remote programming and expandable access options allow full automation across the entire site through multiple entrances. EL2000SS is the durable and reliable choice for retrofitting Plain Old Telephone Service (POTS) based Telephone Entry System (TES).





Versa XS Software

Access Control Management for the EL2000SS and EL25 with New User Interface

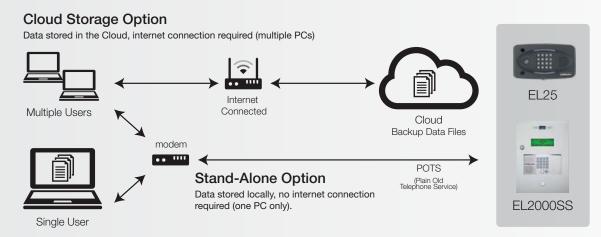







Gated Single Family Home

The quick and easy intercom solution that lets homeowners operate their gate from inside their home without adding additional costs to their phone bill. The EL1SS is a durable, economical solution that ensures added convenience and control from the gate to the garage. Also use MyQ® technology to control both the gate and garage door openers.



Telephone Intercom and Access Control System EL1SS



Residential Linear Actuator Swing LA500PKGU







Elite Series® DC Battery Backup Belt Drive Wi-Fi® Garage Door Opener 8550W



Security+ 2.0® 3-Button Remote Control 893MAX

Stand-Alone Entrance

Our wireless keypad solutions provide convenient access for one or more entrances without trenching wires. They can also be paired with a remote control.



Wireless Keypad KPW250



Commercial Access Receiver STAR1000

1-Button Passport Lite Remote Control PPVL1-10



Commercial Slide Gate Operator CSL24U

LiftMaster Service and Support

We at LiftMaster® are proud of the suite of products we have to offer, and want you to know we are your trusted partner before, during, and after your purchase.

Sales Support

Our sales team is available to guide you to the proper products, or help design a customized solution to meet any and all application needs.

Phone: 800.282.6225

LiftMaster Dealer Extranet

For all of our LiftMaster customers, visit the Dealer Extranet at Dealer.LiftMaster.com for order status, technical support, collateral material, account-specific tools and other support materials.

Customer Care

Our LiftMaster Customer Care representatives are here to help you with account-specific questions, from order placement to order status.

Phone: 800.323.2276

Email: Customer.Service@LiftMaster.com

Technical Support Center

Numerous resources are available to assist with answering your pre- and post-sale technical product questions, from specifications, to installation, to operational troubleshooting.

Phone: 800.528.2806

Website: LiftMasterDealer.custhelp.com/app/ask

Online Support

Find links to user manuals, service bulletins, support videos and our extensive product knowledge base for how-to documents at LiftMaster.com/Customer-Support

Conveniently find FAQs to all your technical product needs.

LiftMaster Training Academy

Educational tools and materials are available for our customers on all of the LiftMaster product offerings, safety standards and industry trends. Online training, regional seminars, online webinars and dedicated training events are available by contacting us.

Online: LiftMasterTraining.com

Email: TrainingAcademy@LiftMaster.com

Phone: 877.872.4650

For Complete Information on Our Products and Software Solutions visit LiftMaster.com







Access Control Product Specifications

Feature	IPAC	IPACIPDCC	EL2000SS	EL25	EL1SS
		Sy	stem Features		
Cloud Connected	Yes	Yes	Data Backup	Data Backup	No
Real-Time Event Monitoring	Yes	Yes	No	No	No
Text/Email Notifications	Yes	Yes	No	No	No
Transaction Buffer	50,000	6,000	4,000	4,000	No
Max. Directory Capacity	50,000	25,000	2,000	2,000	No Directory
Voice Communication	Over DSL or High-Speed Internet	N/A	POTS/DSL	POTS/DSL	Intercom/ POTS/DSL
Data Connectivity	DSL/High-Speed Internet	DSL/High-Speed Internet	Dial-up Modem/ Direct Connect/Keypad	Dial-up Modem/ Direct Connect/Keypad	Keypad
Software	LiftMaster Cloud	LiftMaster Cloud	Versa XS	Versa XS	None
		Bas	sic Input/Output		
Wiegand Inputs	2	2	Up to 4 Wiegand inputs, with 2 (optional) plug-in modules (Part #WOMODKT)	Up to 4 Wiegand inputs, with 2 (optional) plug-in modules (Part #WOMODKT)	None
Gate/Doors of Control	2	2	4	4	2
Additional Gate/ Door Expansion	Virtually unlimited	Virtually unlimited	Shared telephone line for 7 units	Shared telephone line for 7 units	None
			Panel		
Display Type	10" color LCD touchscreen	None	Monochromatic 5" screen; 4 display lines, 20 characters/line	None	None
Postal Lock	Optional/External	Optional/External	Built-in	None	None
Camera Ready	Yes	No	Yes	Yes	None
Mounting Options	Surface/Flush/ Gooseneck	Surface/ Standard Gang Box	Surface/Flush/Gooseneck	Surface/ Gooseneck	Surface/ Gooseneck
Temperature Range	-20°F to 130°F (-29°C to 54°C)	32°F to 125°F (0°C to 52°C)	-4°F to 149°F (-20°C to 65°C)	-4°F to 149°F (-20°C to 65°C)	-4°F to 149°F (-20°C to 65°C)
Height	18 in.	4 in.	16 in.	10.25 in.	6.25 in.
Width	12.75 in.	3.5 in.	11.25 in.	6 in.	10 in.
Depth	3.25 in.	1.25 in.	3.25 in.	4 in.	5.25 in.
Warranty	2 years	2 years	1 year	1 year	2 years

